

NATURAL ANALYSIS OF THE COMPOSITION OF HIGH-TEMPERATURE HEAT-RESISTANT REINFORCED CONCRETE SLAB

Senior lecturer Abdurahmonov Adkhamjon Sultonboyevich, Namangan Engineering-Construction Institute, Republic of Uzbekistan, Tel. +998993206508, adick0377@gmail.com
lecturer Husainov Sarvarhon Muhammadalixon o'g'li, Namangan Engineering-Construction Institute, Republic of Uzbekistan, Tel. +998941719771, sarvarkhon0011@gmail.com

Article History

Received: 08July2023

Revised: 29 Sept 2023

Accepted: 12 Oct 2023

CCLicense

CC-BY-NC-SA

Annotation. *The article describes some aspects of the analysis of structures of heat-resistant reinforced concrete slabs designed to cover the surface of brick ovens. Fragments of crushed stone from bricks were obtained as the main filler in the manufacture of heat-resistant facing slabs. The plate is reinforced for strength, and its protective zone is offset to the neutral axis to protect the armature from temperature. Contains analytical data on scientific research over the years, problems, conclusions about the need for research, the results of experimental tests, the results of studies of porosity and structural aspects of the developed design of heat-resistant plates. This heat-resistant reinforced concrete slab has passed natural tests in brick kilns of brick factories in Namangan and Andijan regions of the Republic of Uzbekistan. Conclusions are made about the application of the obtained research results in production.*

Key words: *brick, brick kilns, temperature preservation, heat-resistant plate, strength, porosity, structure, analysis, coarse aggregate, fly ash, sand, building materials, building structures, experimental research.*

Introduction. To date, certain tasks have been set in the field of construction for the introduction of energy and resource-saving technologies, and a wide range of measures are being taken in this direction. One of the most important objects in the implementation of these tasks is the development of building structures that ensure the quality and efficiency of brick factories.

We know that the internal temperature in a brick kiln is around 1000 ° C. Until recently, expensive kaolin heat-retaining plates were used to cover brick kilns. At the same time, it was found that the cost of such heat-resistant plates affects the cost of manufactured products, as well as a number of shortcomings in the process of application. In addition, the cover constructions made of this heat-resistant material allow using it for a maximum of 6-8 months. Therefore, scientific research in this area and the task of developing and experimentally researching low-temperature heat-resistant coatings on the basis of local industrial waste for brick kilns. Due to the lack of such heat-resistant slab constructions, it can be seen in many brick factories that the quality of the produced bricks is still insufficient.

Scientists around the world have conducted a lot of research on the thermal conductivity of reinforced concrete structures and their materials, and achieved certain results [1-7, 10-18]. However, in these studies, the flammability of existing buildings and structures, as well as reinforced concrete structures, the conditions of stress-strain in structures in the event of a fire

are studied in depth. The effects of high temperatures (600-1000 ° C) over a long period of 10-12 hours have been poorly studied, and insufficient research has been conducted on the creation of heat-resistant structures. In particular, research on the technology of production of heat-resistant ceramic reinforced concrete structures based on industrial waste is not sufficiently developed.

Methods.

In order to study the thermal and technical quality of the developed reinforced concrete slab, the porosity of the reinforced concrete slab construction material was studied. Infrared Fourier spectrometry (SHIMADZU, Japan, 2017) was used [4,10]. The internal structures of the prepared samples were studied and analyzed. The number of waveforms on the scale of the spectral range was $4000 \div 40 \text{ mm}^{-1}$, the resolution was 4 mm^{-1} , the sensitivity to the signal / noise was 60: 1, and the imaging speed was 20 spectra per second.

Symbolic porometry was used to study the porosity of hot concrete, using Thermo Scientific's Pascal 240 EVO series symbolic porosimeter and three types of compositions. All samples were placed on a CD3-type dilatometer, and air was removed from the pores and filled with mercury using a vacuum device. The dilatometer Pascal 240 EVO was then placed in the autoclave and the mercury intrusion was 200 MPa. With the help of special software, the total porosity (%), specific and relative pores (mm^3 / g) were determined.

Results and Discussion.

The new hot-rolled reinforced concrete slabs are made on the basis of industrial wastes and are suitable for use in construction brick kilns and kilns. In the manufacture of the proposed hot-rolled reinforced concrete slab, brick fragments from the building are used as coarse aggregate. In recent years, research conducted at brick factories in Namangan and Andijan regions has shown that the production of new hot-rolled reinforced concrete slabs is influenced by the high temperature in the brick kilns. The heat-resistant slab has been successfully tested for five years at brick factories in Namangan and Andijan regions. The proposed reinforced concrete slabs differ from the existing load-bearing slabs and roofing slabs in the following ways: they are made of brick fragments as aggregates; the working armature is moved a certain distance from the elongation zone due to the calculation, due to the high temperature in the elongation zone (around 1000 ° C); There are additional fillers that provide the strength of hot-rolled reinforced concrete slabs.

The brick fragments attached to the reinforced concrete slab define the macrostructure of the concrete slab. The strength and character of the fractures, their large or small size, shape and granulometric composition are also important. At the same time, sand determines the mesostructure of the reinforced concrete slab material and the water-cement ratio due to its bond with cement, and the slab structure also plays an important role in the formation of macrostructure in concrete.

The robustness of the samples was determined in compliance with the requirements of international standards [8, 9] approved by the Commonwealth of Independent States. So

$R = \alpha \frac{F}{A} K_w$ the average strength of the concrete cube according to the formula was (R) 11.09-15.44 (MPa).

Porosity plays an important role in the heat retention of reinforced concrete slab construction, because the degree of heat retention is ensured due to porosity. Therefore, one of the most important characteristics of reinforced concrete slabs is porosity. Porosity is defined on the basis of the spatial parameters of porosity, the fact that they are part of the total volume, their occupancy and location due to differences in size, as well as the range of sizes. Also, the size of micro-pores (less than 2 nm) in the cement stone of reinforced concrete, meso-pores (2-50 nm) and macro-pores (greater than 50 nm) by the international organization IUPAK (International Union of Pure and Applied Chemistry) and according to the classification of MM Dubinin.) is known to be defined by certain divisions.

Based on this, 3 different samples (I, II, III) were prepared for the experimental study of porosity-permeability-heat resistance, and the porosity in their structures was studied in several compositions.

The indicators of structural porosity of the prepared samples can be seen in Table 1:

Table 1. Characterization of structural porosity of samples

№	Indicators	Unit of measurement	Quantity		
1	2	3	I	II	III
1	Total porosity volume	mm ³ / g	88.38	158.15	154.75
2	The total surface area of the pores	mm ² / g	1.376	11.906	3.077
3	The average diameter of the pores	mkm	0.2569	0.0531	0.2012
4	The diameter between the pores	mkm	1.5094	0.1107	0.5941
5	The modal diameter of the cavity	mkm	0.0098	0.0089	0.0091
6	The general porosity of the sample	%	19.391	30.212	29.444

I, II, III - the total porosity of the samples was determined and a comparison histogram was developed (Figure 1):

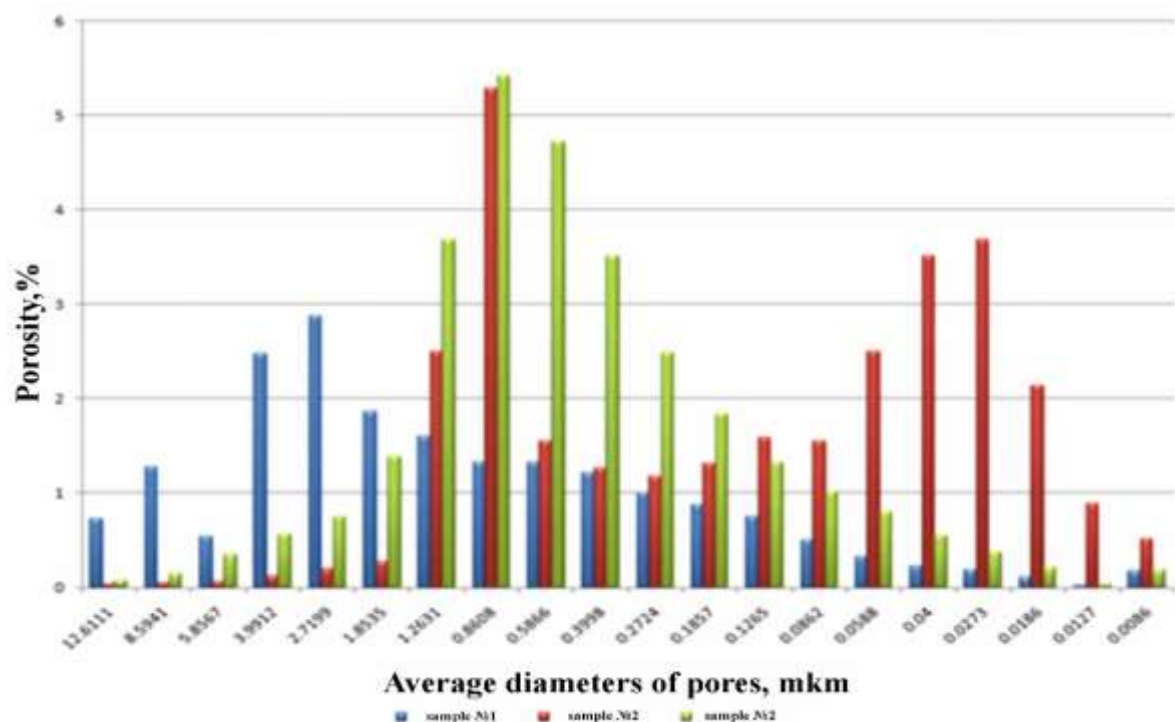


Figure 1. Histogram comparing total porosity by size: the total porosity of the first sample was 19.391%, the second sample was 30.212%, and the third sample was 29.444%.

The analysis of the above data shows that the total porosity of the first component is 19.391% and the contribution of the largest pores is M.M. Based on Dubinin's and [5-7] classifications, it was shown to be in the range of 15–1.26 mkm, and that these porosities affect the physical and mechanical properties (strength, cold resistance, and permeability) of concrete.

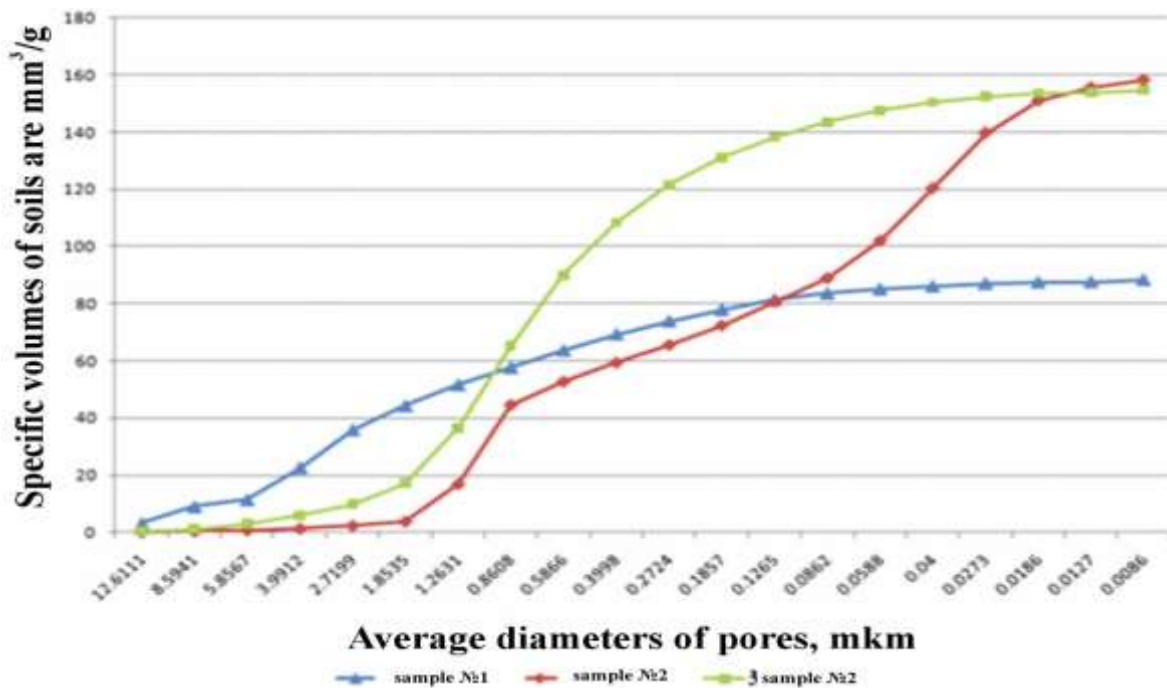


Figure 2. Graph of comparison of specific volumes of pores of samples

In the second composition, the main set of pores was found to be in the range of 1.26-0.18 mkm and 0.0588-0.0186 mkm. The total porosity of the content was 30.12%.

The total porosity of the third component studied was 29.444%. The main pores were found to be in the 1.26-0.0862 mkm size range. Based on the results of the research, a comparison chart was developed for the relative size of the pores of the samples (Figure 2).

When the specific volumes of samples 2 and 3 were 158.15 and 154.75, it was observed that the specific volume of sample 1 was twice less (Figure 3).

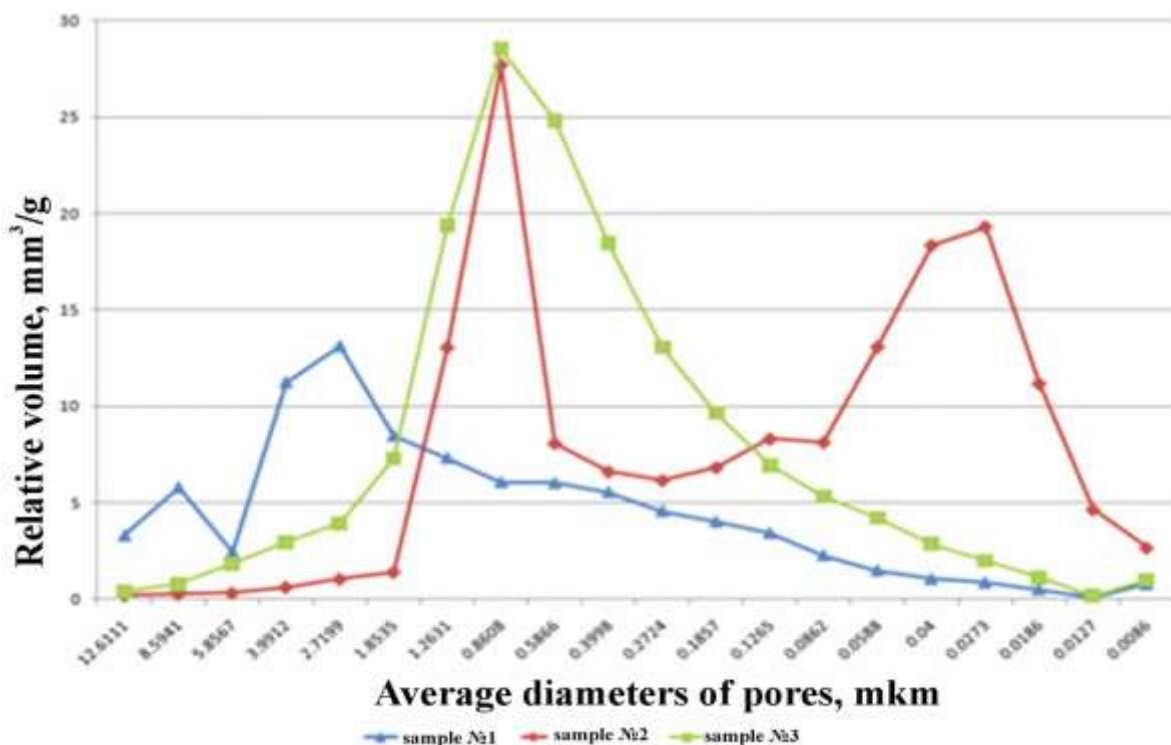


Figure 3. Graph comparing the relative sizes of the pores of the samples

A comparison of the specific and relative porosity volumes of the samples showed that, based on the theory of heat retention of pores, it was determined that it was expedient to use the second and third components as heat-resistant reinforced concrete structures.

Based on the results of the study, it was found that the total porosity of the heat-resistant structure is in the range of 20-30%. It was noted that it is possible to prepare a heat-resistant structure of these parameters, to meet the regulatory requirements for them [10].

In the study, M.M. Dubinii and based on the classifications [5-7], the hazardous and non-hazardous porosities of the studied compounds were studied (Fig. 4). It was found that the best content in terms of safe porosity is the second content. The highest risk porosity index corresponds to the third content.

Subsequent studies have devoted to microscopic analysis to study the composition of heat-resistant concrete and the new composition in its structure. This in turn helped to obtain information about the new composition. The research was conducted using the existing SHIMADZU instrument in the laboratory of the Center for High Technologies in Tashkent. As an example, 3 (I, II, III) components were used: 1). Sample made of bricks of Shohidon brick factory (Namangan region); 2). Sample made of bricks of Khanabad brick factory (Andijan region); 3). Laboratory-prepared sample (NamECI).

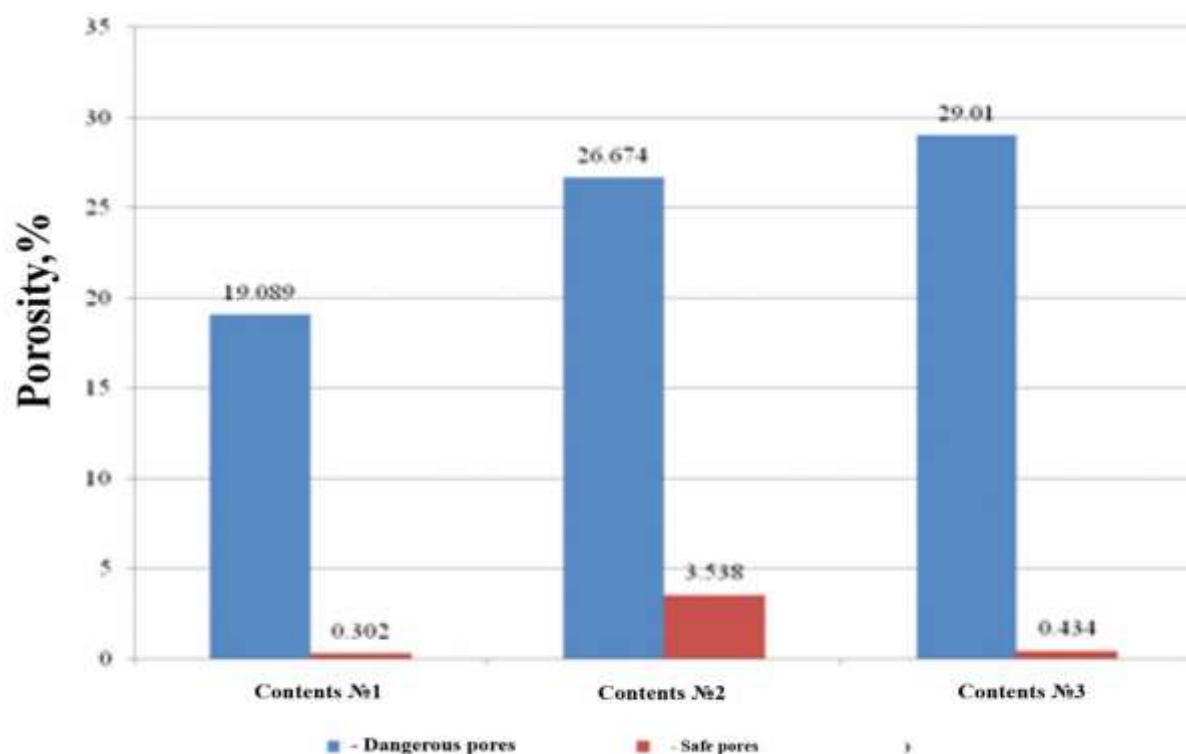


Figure 4. Dangerous and unsafe porosity of the ingredients under study
The results of the chemical composition of the samples are given in Table 2:

Table 2. Chemical composition of samples

№	Element			Weight, %			Sigma, weight, %		
	I	II	III	I	II	III	I	II	III
1	O	O	O	41.1	41	47.9	0.9	0.8	1.0
2	Ca	Ca	Ca	30.6	35.7	19.9	0.6	0.6	0.5
3	Si	Si	Si	9.2	6.8	15.6	0.3	0.2	0.4
4	C	Al	C	6.4	5.4	9.4	0.7	0.2	1.6
5	Fe	C	Al	6.2	5.4	2.8	0.5	0.6	0.2
6	Al	S	Fe	4.8	2.6	1.6	0.2	0.2	0.3
7	S	Fe	S	0.9	2.1	1.4	0.1	0.4	0.1

8	Mg	Mg	K	0.9	1.0	0.5	0,1	0.1	0.1
9			Mg			0.8			0.1

I-sample. Results obtained at 250 μ m according to the sample made of bricks of Shohidon brick factory:



Figure 5. Results of X-ray phase and microstructural analysis (Shohidon brick factory brick): a) results of X-ray phase analysis; b) Microstructure of the sample of heat-resistant ceramic concrete slab: cement, quartz sand, ash powder, crushed brick.

II-Sample. Results obtained at 250 μ m according to the sample made of bricks of Khanabad brick factory:

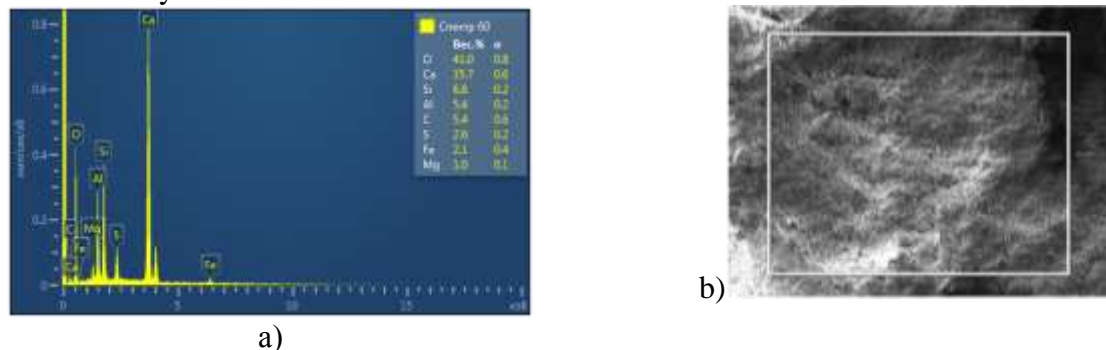


Figure 6. Results of X-ray phase and microstructural analysis (Khanabad brick factory brick): a) results of X-ray phase analysis; b) microstructure of heat-resistant ceramic concrete slab sample: cement, quartz sand, ash powder, crushed brick.

Sample III: Results obtained at 250 μ m according to the sample (NamECI) prepared in the laboratory "Building materials" of Namangan Engineering-Construction Institute:

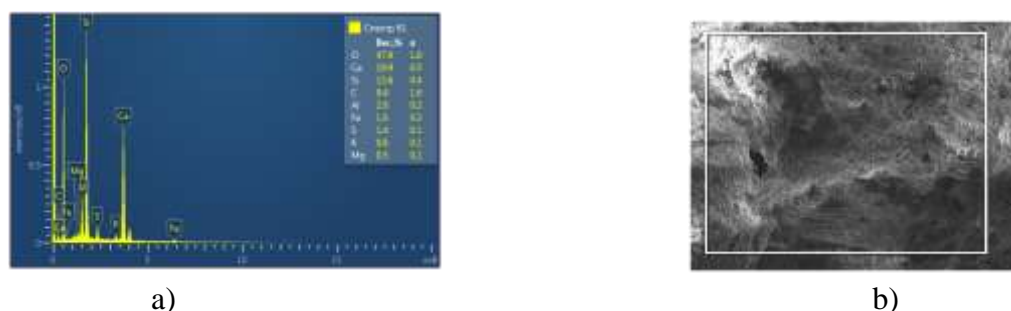


Figure 7. Results of X-ray phase and microstructural analysis (NamECI laboratory): a) results of X-ray phase analysis; b) Microstructure of the sample of heat-resistant ceramic concrete slab: cement, quartz sand, ash powder, crushed brick.

In general, it was recommended that the selected composition for the proposed heat-resistant reinforced concrete slab for brick kilns should also be used to cover the walls of heating aggregates.

Conclusions

As a result of the tests, the following conclusions were drawn on the samples:

1. Based on the results of the study, it was determined that the total porosity of the heat-resistant structure can be obtained in the range of 20-30%.
2. Based on the comparison of the relative and relative porosity volumes and based on the theory of thermal retention of pores, it was determined that the second and third components can be obtained as heat-resistant reinforced concrete structures.
3. The highest rate of hazardous porosity was observed and determined in the third component.
4. In terms of the contribution of safe pores, the best content was found to be the second content.
5. As a general final recommendation, it was determined that the most suitable composition for use in heat-resistant structures is the second composition.

List of used literatures

- [1]. Decree of the President of the Republic of Uzbekistan dated February 7, 2017 No. PF-4947 "On the Strategy of Actions for the Further Development of the Republic of Uzbekistan".
- [2]. Resolution of the President of the Republic of Uzbekistan dated June 19, 2009 No. PQ-1134 "On additional measures to encourage the increase in the production of wall materials and improve their quality".
- [3]. Милованов А.Ф. Стойкость железобетонных конструкций при пожаре.-М.: Стройиздат, 1998.-304 с.: ил.-ISBN 5-274-01695-2.
- [4]. Полевода И.И., Зайнудинова Н.В. Моделирование поведения железобетонных предварительно напряженных плит без сцепления арматуры с бетоном в программном комплексе ANSYS. Вестник Университета гражданской защиты МЧС Беларуси, Т. 1, №4, 2017. –С. 385-391.
- [5]. В.Н.Демехин. Поведение бетонных конструкций при пожаре. Санкт-Петербург. Стройпрофиль №7(93) 2011. -С.10-12. www.spf.ccr.ru, www.stroy-press.ru.
- [6]. Абдурахмонов А.С. Пути снижения обезвоживания бетонной смеси и трещинообразования в железобетонных изделиях при их изготовлении. Актуальные вопросы архитектуры и строительства // XI Всероссийская научно-техническая конференция. Новосибирский государственный архитектурно-строительный университет. Россия, Новосибирск.-2018.-С. 37-42.
- [7]. А.И. Адилходжаев, И.А. Кадыров, К.С. Умаров. Исследование пористости цементного камня с цеолитсодержащим наполнителем и суперпластификатором // Вестник ТашИИТ № 3, 2020 г. С. 15-22.
- [8]. А.И. Адилходжаев, И.А. Кадыров. Некоторые аспекты исследования структуры строительных материалов методом ртутной порометрии // Вестник ТашИИТ № 2/3, 2018 г. С. 3-7.
- [9]. А.И. Адилходжаев, И.А. Кадыров. О влияние пористости на морозостойкость бетона // “Таълим, фан ва ишлаб чиқариш интеграциясида инновацион технологияларни қўллаш - мамлакат тараққиётининг муҳим омили” мавзусидаги XV республика илмий-амалий конференцияси материаллари, Самарқанд, 2018 йил, 2-3 июнь. 102-104 бетлар.
- [10]. ГОСТ 10180-2012. Межгосударственный совет по стандартизации, метрологии и сертификации. Бетоны. Методы определения прочности по контрольным образцам. М.: Стандартинформ, 2013., -31с.
- [11]. ГОСТ 20910-2019 Бетоны жаростойкие. Технические условия. Межгосударственный стандарт. Бетоны жаростойкие. Официальное издание. М.: Стандартинформ, 2019 год. – 17с.
- [12]. А.Х. Алиназаров, С.Ж. Раззаков, Э.С.Жураев, Ё. Н. Рахматуллаев. Гелиотеплохимическая обработка многокомпонентных цементных композиций //

Материалы III международной научно-практической конференции «качество. технологии. инновации». – Новосибирск: НГАСУ (сибстрин), 2020. – 206-218 С.

[13]. Раззаков С.Ж., Холмирзаев С.А., Абдурахмонов А.С. Иссиқбардош темирбетон плитани экспериментал тадқиқ қилиш // Научно-технический журнал ФерПИ № 1, 2020 г., - 71-78 С.

[14]. Павленко Н.В., Исследование взаимосвязи структурных и тепловлажностных характеристик на примере пенобетона на основе наноструктурированного вяжущего/ Пастушков П.П., Хархардин А.Н., Войтович Е.В.// Вестник СибАДИ. – 2016. - № 6(52). – С. 80-86.

[15]. Enhancing the strength of pre-made foams for foam concrete applications/ Ailar Hajimohammadi, Tuan Ngo, Priyan Mendis// Cement and Concrete Composites. - Volume 87, March 2018, Pages 164-17.

[16]. Александровский С.В. Прикладные методы теории теплопроводности и влагопроводности бетона. – М.: Компания Спутник, 2001. – 186с.

[17]. Горлов Ю.П. Технология теплоизоляционных и акустических материалов и изделий. – М.: Высш.шк., 1989. – 384 с.

[18]. Хаджиев М.Р., Теплотехнические и физико-механические характеристики легких керамобетонов на основе вторичных заполнителей из кирпичного боя / М.Р. Хаджиев, В.Х. Хадисов // II Современные строительные материалы, технологии и конструкции: материалы Международной научно-технической конференции, посвященной 95-летию ФГБОУ ВПО «ГТНТУ им. акад. М.Д. Миллиошчикова», 24-26 марта 2015 г. – Грозный: ФГУП «Издательско-полиграфический комплекс «Грозненский рабочий», 2015. Т.2. – С. 257-263.

[19]. Муртазаев С-А.Ю. Использование местных техногенных отходов в мелкозернистых бетонах / С-А.Ю. Муртазаев, З.Х. Исмаилова // Строительные материалы. 2008. № 3. – С.57-61.

1. [20]. Семченко Г.Д. Ультралегковесная корундовая керамика с использованием золь-гелькомпозиций // Стекло и керамика. 1997. № 5. – С. 15-18.